



UNIROOF AT UNIROOF ST

versatile easy to maintain

efficient



#uniroof

www.leister.com

We know how.

UNIROOF AT/ST: Welding close to the edge made easy.

The new UNIROOF AT/ST roof welder is your flexible partner for welding thermoplastic roofing membranes on flat or pitched roofs (up to 30°). Thanks to its slim design and construction, as well as the movable transport axle, converting of the machine is no longer needed. Now, you can effortlessly weld close to the edge (to 100 mm/4 inches) at the parapet or on the parapet and as easily in narrow circumstances.

Hot-air welder

UNIROOF AT/ST



No more time consuming converting: The ultra slim roof welding machine with its movable transport axle masters welding close to the edge (up to 100 mm/ 4 inches) at or on the parapet, and wherever it gets narrow.



UNIROOF provides elaborate ergonomic handling thanks to steering bar and handle: Roll or carry the UNIROOF whenever, wherever you want to, it's so handy!



UNIROOF AT: The closed-loop technology for drive motor, temperature and air blower keeps the welding parameters at a constant level and thus delivers reliably leak proof results – a clear asset when it comes to process reliability and investment safety.



UNIROOF AT: Functional control panel with display for welding parameters (set point and actual figures during runtime) as well as voltage for better control. Save time with programmable welding profiles for common roof membranes.




UNIROOF ST for purists: **Closed-loop** controlled drive motor with **open-loop technology** for the control of temperature and air blower. Simple control (regulation) with potentiometer/rotary knobs.



Optimum overall performance and easy-to-operate: The direct-driven, maintenance-free pressure wheel [brushless drive motor integrated in pressure wheel] leads to higher contact pressure, welding speed and thus causes zero chain wear.

Swiss made

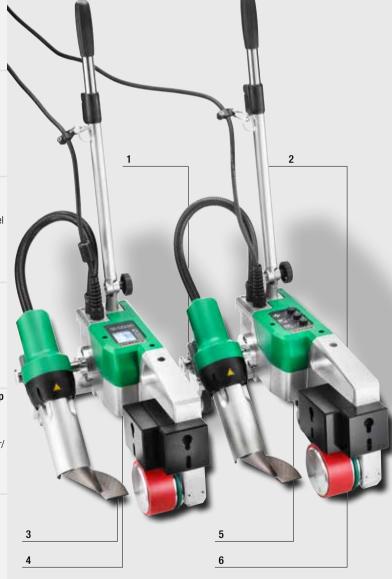

5

With 3450 W performance, 230 V and 15 Amps in the box, the UNIROOF AT/ST offers speedy top performance on any roof.



Thanks to its ultra slim design, the UNIROOF welds effortlessly even in areas which are narrow and difficult to access.

Hot-air welder

UNIROOF AT/ST

- No converting: Thanks to the movable transport axle the UNIROOF masters welding close to edge at or on top of the parapet.
- Swiss Quality you can rely on.
- The direct-driven, maintenance-free pressure wheel [drive motor integrated in pressure wheel] leads to clearly optimized overall performance and is easy to service.
- Field tested design for ergonomic handling, flexible relocating and optimal machine guiding.
- Greater efficiency at construction sites: The new UNIROOF class brings an additional 38% (ST) to 66% (AT) higher welding performance compared to similar machines.

Technical Data

		UNIROOF AT	UNIROOF ST			
Voltage	V~	100 / 120 / 220 – 240				
Frequenz	Hz	50/60				
Power	W	1500 / 1800 / 3450				
Temperature, stepless	°F	210 – 1150				
Air flow range	%	45 – 100				
Drive speed, stepless	ft/min	3.3 - 33.0				
Size (L \times B \times H)	inch	$18.7 \times 9.6 \times 10.3$				
Weight	lbs	38.6 (incl. 3 additional weights)				
Materials		PP, PVC, TPO, ECB, EPDM, EVA, FPO, PO, PIB (other materials upon request)				
Conformity mark		C€				
Protection class I						
Fan		maintenance-free	brush motor			
Operation		Digital with display	Potentiometer			
Temperature control		Closed-loop System	Open-loop System			

Article No.:

153.598	UNIROOF AT, 220 – 240 V/3450 W, 40 mm (1.6 inch), with Euro-plug
154.453	UNIROOF AT, $220 - 240 \text{ V}/3450 \text{ W}$, 40 mm (1.6 inch), US without plug
153.599	UNIROOF AT, 120 V / 1800 W, 40 mm (1.6 inch), with US-plug
154.260	UNIROOF AT, 100 V/1500 W, 40 mm (1.6 inch), with JP-plug
153.600	UNIROOF ST, $220 - 240 \text{ V}/3450 \text{ W}$, 40 mm (1.6 inch), with Euro-plug
154.454	UNIROOF ST, $220 - 240 \text{ V}/3450 \text{ W}$, 40 mm (1.6 inch), US without plug
153.601	UNIROOF ST, 120 V/1800 W, 40 mm (1.6 inch), with US-plug
154.261	UNIROOF ST, 100 V/1500 W, 40 mm (1.6 inch), with JP-plug

Accessories UNIROOF AT/ST

	155.325	Grip-nozzle 1.6 inch
	152.742	Additional weight, front
	152.741	Additional weight, lateral
	154.462	Nozzle calibration device
	132.429	2 welding plates for optimum welding start
3	138.817	Steelbrush to clean nozzle
	154.522	Transportation axle 11.8 inch
	154.827	Storage case UNI
	155.577	Locking plate for additional weights
	155.473 153.947 154.231	Heating element 230 V / 3300 W Heating element 120 V / 1800 W Heating element 100 V / 1500 W
	137.843	T-shape guide bar

www.leister.com



Our close worldwide network of more than 130 Sales and Service Centers in more than 100 countries.

Europe:	Sweden	Poland	Chile	Africa:	Indonesia
Andorra	Switzerland	Romania	Colombia	Algeria	Japan
Austria	Turkey	Russia	Ecuador	Botswana	Korea
Belgium	United Kingdom	Serbia	Peru	Egypt	Macao
Cyprus	Vatican	Slovakia	Venezuela	Ivory Coast	Malaysia
Denmark	Albania	Slovenia		Kenya	Myanmar
Finland	Armenia	Ukraine	Central Asia:	Lesotho	Mongolia
France	Azerbaijan		Kazakhstan	Libya	Pakistan
Germany	Belarus	America:	Kyrgyzstan	Malawi	Philippines
Greece	Bosnia-Herzegovina	Canada	Tajikistan	Morocco	Singapore
Iceland	Bulgaria	Mexico	Turkmenistan	Mozambique	Taiwan
Ireland	Croatia	USA	Uzbekistan	Namibia	Thailand
Italy	Czech Republic	Belize		South Africa	Vietnam
Luxembourg	Estonia	Costa Rica	Middle East:	Swaziland	
Malta	Georgia	El Salvador	Bahrain	Tunisia	Oceania:
Monaco	Hungary	Guatemala	Iran	Zambia	Australia
Netherlands	Kosovo	Honduras	Iraq	Zimbabwe	New Zealand
Norway	Latvia	Nicaragua	Israel		
Portugal	Lithuania	Panama	Jordan	Asia Pacific:	
Liechtenstein	Macedonia	Argentina	Qatar	China	
San Marino	Moldova	Bolivia	Saudi Arabia	Hong Kong	
Spain	Montenegro	Brazil	U.A.E	India	
				@ Conve	ight by Laister Switzer

Distributor Addresses:

info@leisterusa.com

info@leister.nl

info@leister.in

Leister Technologies Italia srl 20090 Segrate / Italia phone: +39 02 2137647 info@leister.it

Leister Technologies India Pvt 600 041 Chennai / India phone: +91 44 2454 3436

Leister Technologies Ltd.
Shanghai 201 109 / PRC
phone: +86 21 6442 2398
leister@leister.cn

Leister Technologis KK
Osaka 564-0051 / Japan
phone: +81 (6) 6310 6200
sales-japan@leister.com

Leister Technologies Benelux BV
3991 CE Houten / Nederland
phone: +31 (0)30 2199888